

Platinum MP-3000 Installation Guide

1. Locate your existing Protege/Audio Emcee MOH player.
2. Locate the audio cord that connects your Protege/Audio Emcee player to the telephone system.
 - a. On XE-500 models, the audio cord connects on the front of the player. [FIG1]
 - b. On XE-370 models, the audio cord connects on the back of the player. [FIG 2]
3. Disconnect the audio cord from your Protege/Audio Emcee player.
 - a. On XE-500 models, you must remove the adapter from the plug. [FIG 3]
4. Plug the audio cord into the line out cord on the MP-3000 (included). [FIG 4]
5. Insert the USB key (included) into the MP-3000 port labeled USB. [FIG 5]
6. Turn on the unit by pressing the power button. [FIG 4]
7. You may adjust the volume of the on-hold messages with the Volume Up or Down buttons located on the front of the MP-3000 unit. [FIG 4]



FIG 1



FIG 2




FIG 3



FIG 4



FIG 5

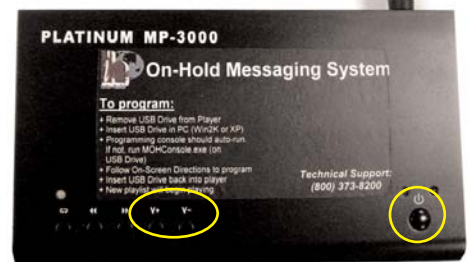

Volume

Power